


IPC-MBMI10

Mini-ITX Motherboard

14th/13th/12th Gen Intel® Core™ DT Processors
(RPL-S Refresh Platform) with Intel® R680E PCH

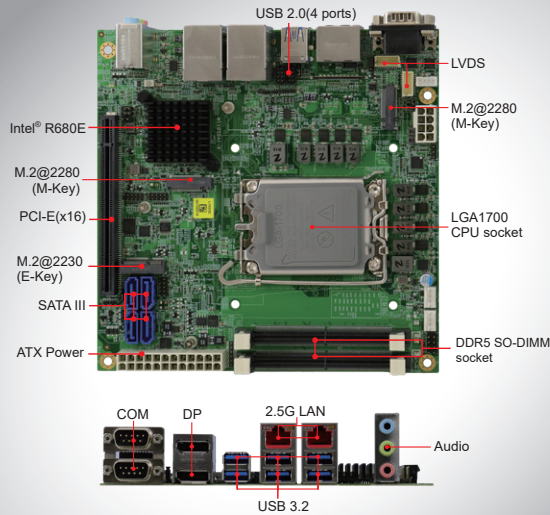

Features

- 14th/13th/12th Gen Intel® Core™ i9/i7/i5/i3 DT processors, up to 65W
- 2x DDR5 SO-DIMM sockets, Max. 64GB, support ECC
- Intel® processor integrated graphic supports eDP, LVDS and 2x DisplayPort (1.4a) (DP++)
- LAN 1: Intel® I226LM, supports 2.5G and iAMT
LAN 2: Intel® I226V, supports 2.5G
- 6x USB 3.2, 4x USB 2.0, 2x COM, 4x SATA III
- 1x PCI-E (x16) [Gen.5.0]; 3x M.2 (1x E-Key for WiFi/BT and 2x M-Key for NVMe)
- Supports watchdog timer, Digital I/O, iAMT (16.1), TPM (2.0)


Specifications

CPU Socket	LGA1700
CPU	14th/13th/12th Gen Intel® Core™ i DT processors
PCH	R680E
Memory	2x DDR5 SO-DIMM sockets, supports DDR5 -5600 memory module , Max. 64GB *DDR5-5600 only by Core i7 Processor & 1R memory module*
BIOS	AMI
Watchdog Timer	256 levels
H/W Monitor	Yes
Storage Device Interface	SATA III & NVMe
Expansion Slots	1x PCI-E (x16) [Gen 5.0]
Mini Type Slots	2x M.2 (M-Key, type:2280, PCI-E(4x) Gen.4) 1x M.2 (E-Key, type:2230, USB 2.0 + PCI-E 3.0)
Graphics Controller	14th Gen Intel® RPL-S Refresh DT processor integrated Xe graphics architecture
Video Output	1x eDP + 2 x DisplayPort (1.4a) (DP++) + LVDS
Ethernet	LAN 1: Intel® I226LM , supports 2.5G and iAMT LAN 2: Intel® I226V, supports 2.5G only
I/O Chipset	Fintek F81964D-I
Serial Port	2x COM ports: 1x RS232/422/485 + 1x RS232
USB 2.0	4x USB 2.0 via pin-headers
USB 3.X	2x USB 3.2 (10Gbps)+ 4x USB 3.2 (5Gbps) @edge connector
Serial ATA	4x SATA III
Audio	Built-in HD audio controller + Realtek ALC888S w/ 7.1 channels
TPM	Supports dTPM/ fTPM
Others	Digital I/O (4-in/4-out) , Watchdog timer, PDPC
Dimensions (L x W)	170mm x 170mm (6.7"x 6.7")
Power Consumption	14th Gen Intel® Core™ i9-14900 w/ 2x 32GB DDR5 Transcend TS4GSA64V6E +12V:23.17A
Operating Temperature	0°C~60°C (32°F~140°F)
Storage Temperature	-20°C~80°C (-4°F~176°F)
Relative Humidity	90% (non-condensing @60°C)

Ordering Information

IPC-MBMI10	LGA1700 Mini-ITX Motherboard w /eDP, LVDS, 2x DisplayPort, 2x Dual 2.5GbE, 4x SATA, RAID, iAMT (16.1), dTPM
IPC-MBMI10-1	LGA1700 Mini-ITX Motherboard w /eDP, LVDS, 2x DisplayPort, 2x Dual 2.5GbE, 4x SATA, RAID, iAMT (16.1), fTPM (2.0)

Dimensions and Drawing

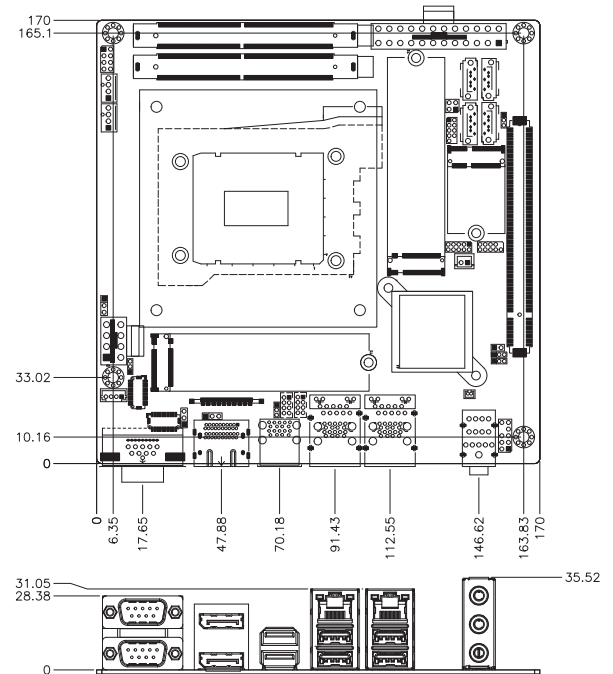

* All information contained in this document is subject to change without prior notice. Please log on www.antcomputer.com to acquire latest information. For detail mechanics drawing, please contact our sales.